

TULSA CHAIN.COM



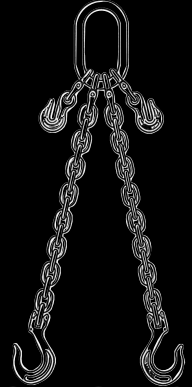
Rigging Superstore



ISO 9001-2000 CERTIFIED








**LacledeAlloy®
Slings
G80**

1. Never exceed working load limit
2. Do not tip load hooks
3. Remove all twists, knots, and kinks before lifting
4. Avoid jerking or creating shock loads
5. Use pads to cover sharp corners
6. Do not drop or rest loads on chain
7. Balance loads evenly to avoid excessive forces on chain
8. Keep hands, feet and other body parts from between slings and load
9. Do not field repair a chain sling
10. Destroy a chain sling beyond use if it's not repairable



Working Load Limit in Pounds

G80

G80							
CHAIN SIZE Inches mm	SINGLE- 90 Lbs. Kg	DOUBLE-60 Lbs. Kg	DOUBLE- 45 Lbs. Kg	DOUBLE-30 Lbs. Kg	TRIPLE/QUAD-60 Lbs. Kg	TRIPLE/QUAD-45 Lbs. Kg	TRIPLE/QUAD-30 Lbs. Kg
9/32"	3, 500	6, 100	4, 900	3, 500	9, 100	7, 400	5, 200
7	1, 600	2, 750	2, 250	1,600	4, 150	3, 400	2, 400
5/16"	4,500	7, 800	6,400	4, 500	11, 700	9, 500	6, 800
8	2, 000	3, 550	2, 900	2, 000	5, 350	4, 350	3,100
3/8"	7, 100	12, 300	10, 000	7, 100	18, 400	15, 100	10, 600
10	3, 200	5, 500	4, 500	3, 200	8, 300	6, 800	4, 800
1/2"	12, 000	20, 800	17, 000	12, 000	31, 200	25, 500	18, 000
13	5, 400	9, 450	7, 700	5, 400	14, 150	11, 550	8, 200
5/8"	18, 100	31, 300	25, 600	18, 100	47, 000	38, 400	27, 100
16	8, 200	14, 200	11, 600	8, 200	21, 300	17, 400	12, 300
3/4"	28, 300	49, 000	40, 000	28, 300	73, 500	60, 000	42, 400
20	12, 800	22, 250	18, 150	12, 800	33, 400	27, 250	19, 300
7/8"	34,200	59, 200	48, 400	34, 200	88, 900	72, 500	51, 300
22	15,500	26, 850	21, 900	15, 500	40, 250	32, 900	23, 250
1"	47, 700	82, 600	67, 400	47, 700	123, 900	101, 200	71, 500
26	21, 600	37, 500	30, 600	21, 600	56, 250	45, 950	32, 500